

Office light series



novalux
DESIGN



CATALOGUE



335-336
Surface mounted & pendant lamp



337-338
Surface mounted & pendant lamp



339
Surface mounted office light



340
Surface mounted office light




341
Surface mounted office light



342
Surface mounted office light



343
Surface mounted office light

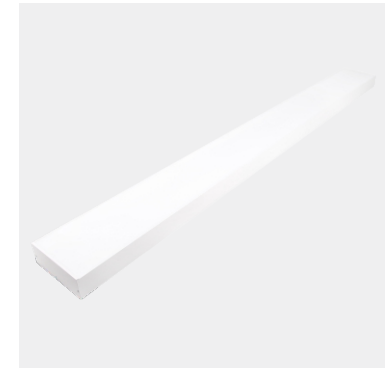


349
Surface mounted office light



350
Surface mounted office light



351
Concealed office light

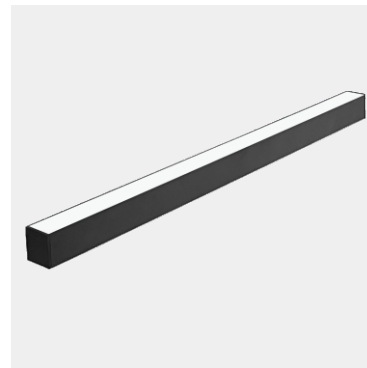

353
Surface mounted office light





Surface mounted & pendant lamp

1200mm



33mm



70mm

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-GS9L	40W	3600LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-GFG252	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-GFG333	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-GFG111	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-GFG13131	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-GFG1113111	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTc

OSRAM

The Beam Angle



24°

120°

Color



Black

White



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU



0-10V





2.4G SMART





Surface mounted & pendant lamp

1200mm

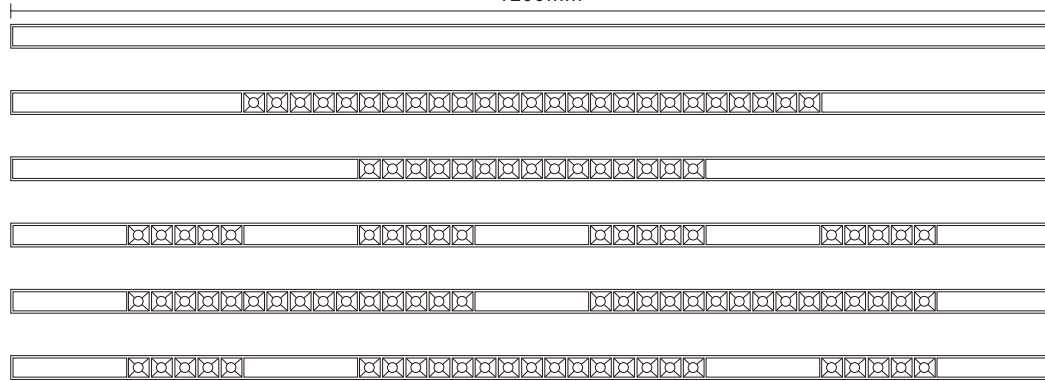

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-FG9L	40W	3400LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-FGF252	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-FGF333	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-FGF111	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-FGF13131	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM
KNS-DD-FGF1113111	40W	3500LM	1200*33*70	20PCS/	136.5*20*18CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX



OSRAM

The Beam Angle




Color




Black

White

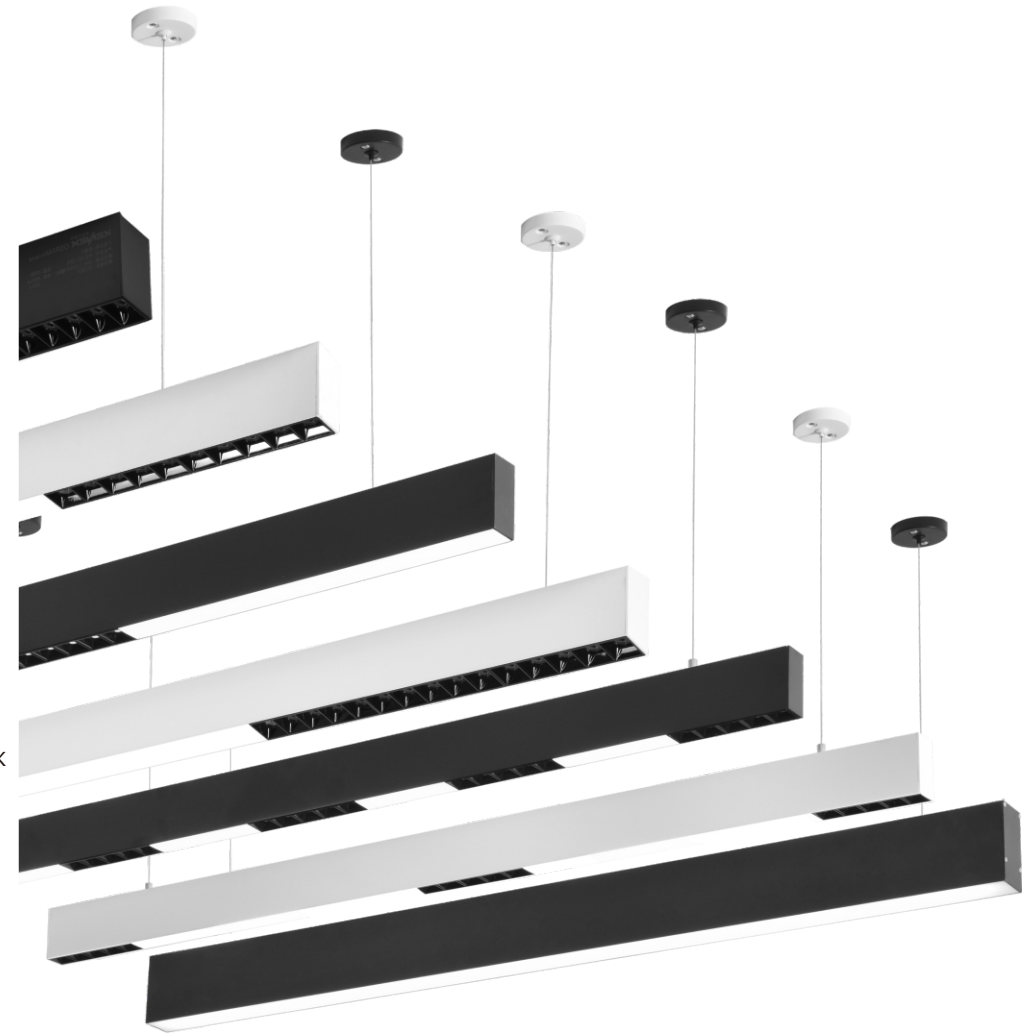

Surface mounted & pendant lamp

1200mm

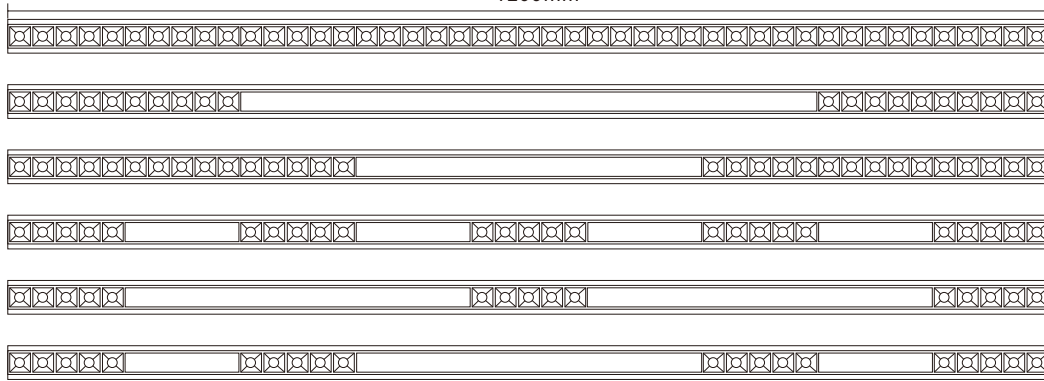

42mm



Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DDX-GS9L	40W	3600LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-GFG252	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-GFG333	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-GFG111	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-GFG13131	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-GFG1113111	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTc

OSRAM

The Beam Angle



24°

120°

Color



Black

White

Golden



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU



0-10V




2.4G SMART




Surface mounted & pendant lamp

1200mm

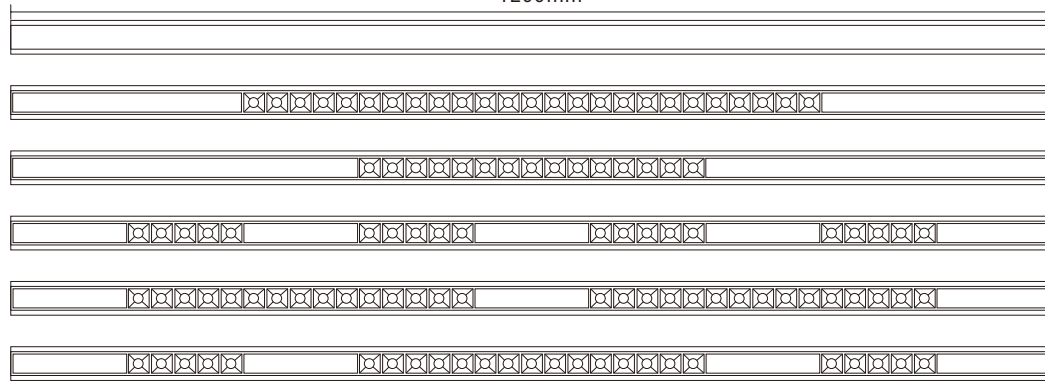

42mm



Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DDX-FG9L	40W	3400LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-FGF252	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-FGF333	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-FGF111	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-FGF13131	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM
KNS-DDX-FGF1113111	40W	3500LM	1200*42*80	20PCS/	128.5*31.5*19CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTc

OSRAM

The Beam Angle



24°

120°

Color



Black

White

Golden



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU




0-10V



2.4G SMART



Surface mounted & pendant lamp

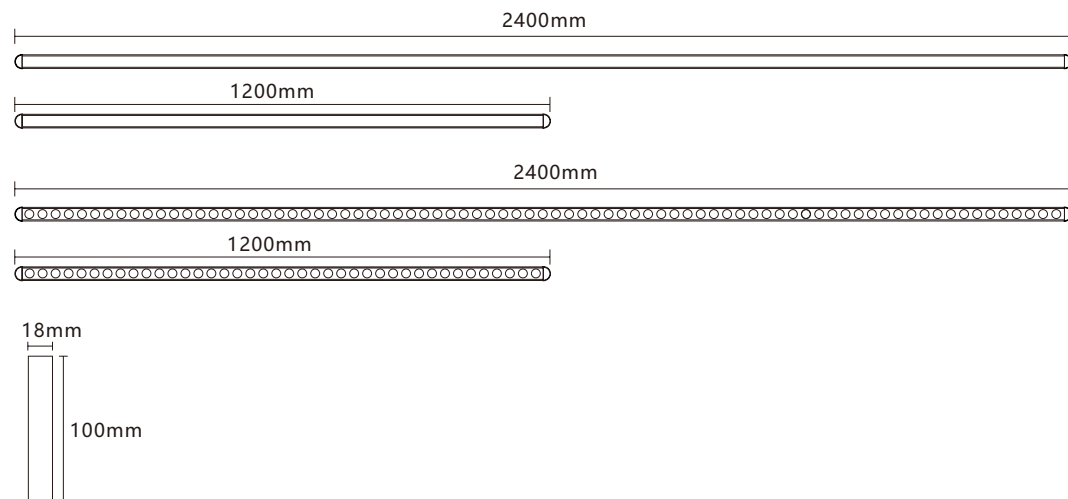

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-FG18100-1.2M	40W	3400LM	1200*18*100	10PCS/	123*45*47CM
KNS-DD-FG18100-2.4M	80W	6800LM	2400*18*100	10PCS/	243*45*47CM
KNS-DD-GS18100-1.2M	40W	3600LM	1200*18*100	10PCS/	123*45*47CM
KNS-DD-GS18100-2.4M	80W	7200LM	2400*18*100	10PCS/	243*45*47CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle



24°

120°

Color



Black



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI




XIAODU



0-10V




2.4G SMART

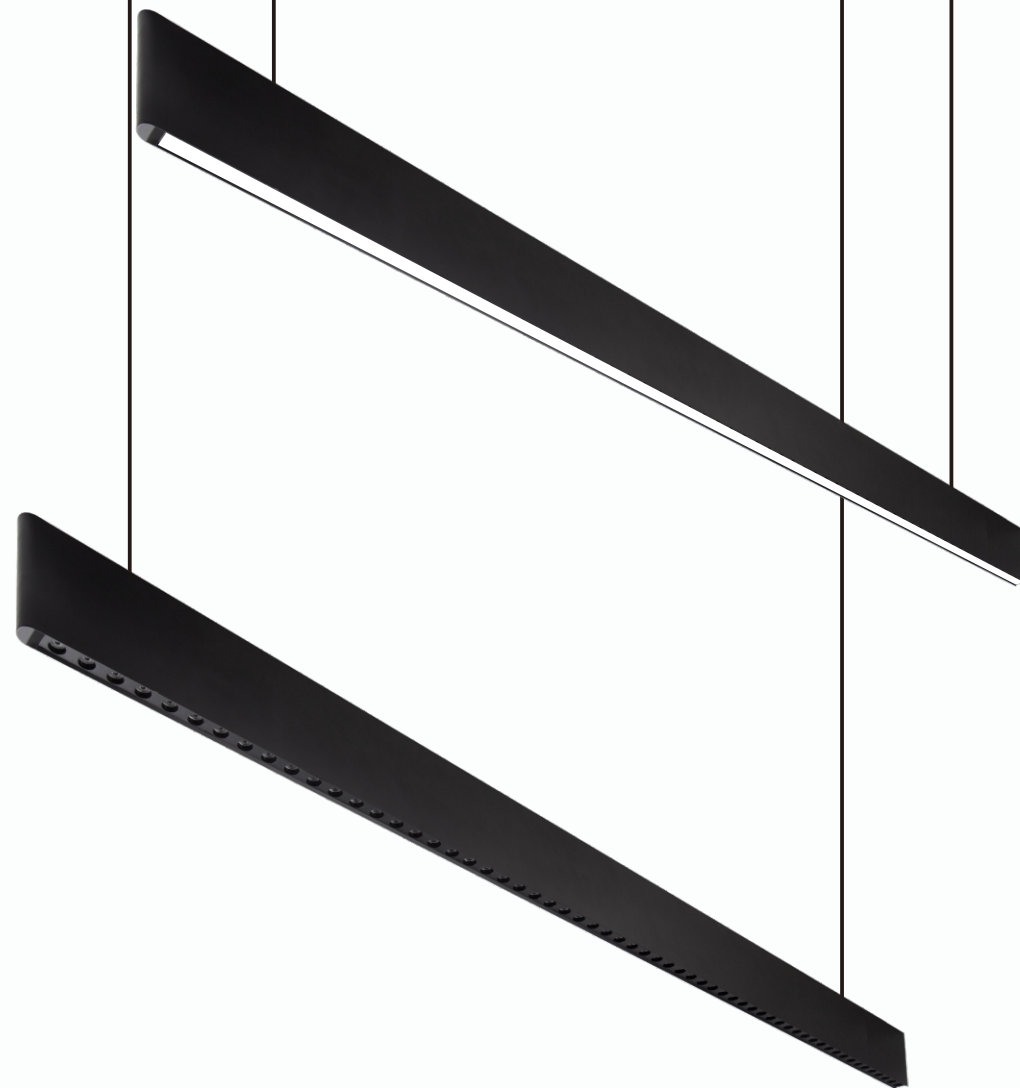



Surface mounted & pendant lamp

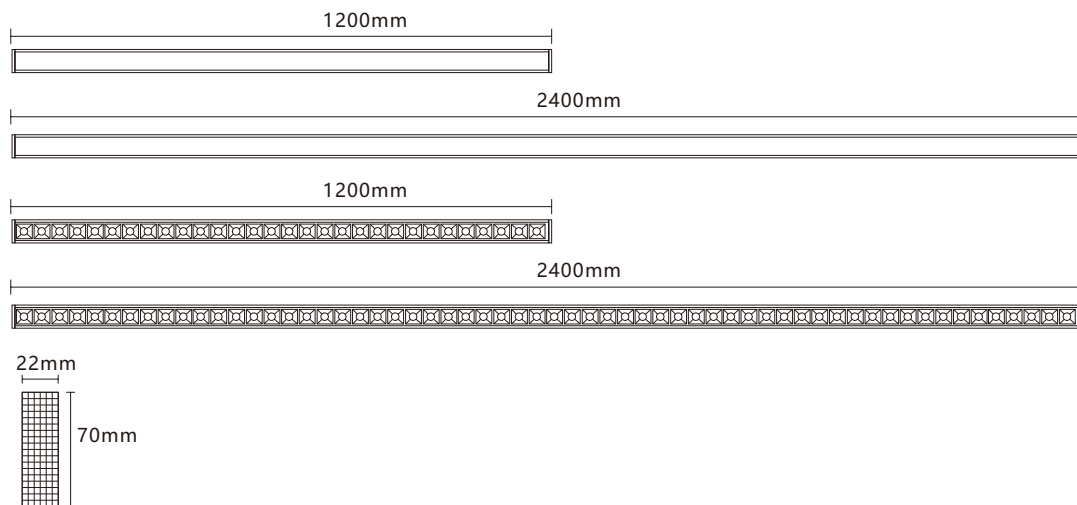

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-FG2270-1.2M	30W	2250LM	1200*22*70	10PCS/	125*39*47CM
KNS-DD-FG2270-2.4M	60W	5100LM	2400*22*70	10PCS/	245*39*47CM
KNS-DD-GS2270-1.2M	30W	2700LM	1200*22*70	10PCS/	125*39*47CM
KNS-DD-GS2270-2.4M	60W	5400LM	2400*22*70	10PCS/	245*39*47CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTc

OSRAM

The Beam Angle



24°

120°

Color




Black





Surface mounted & pendant lamp

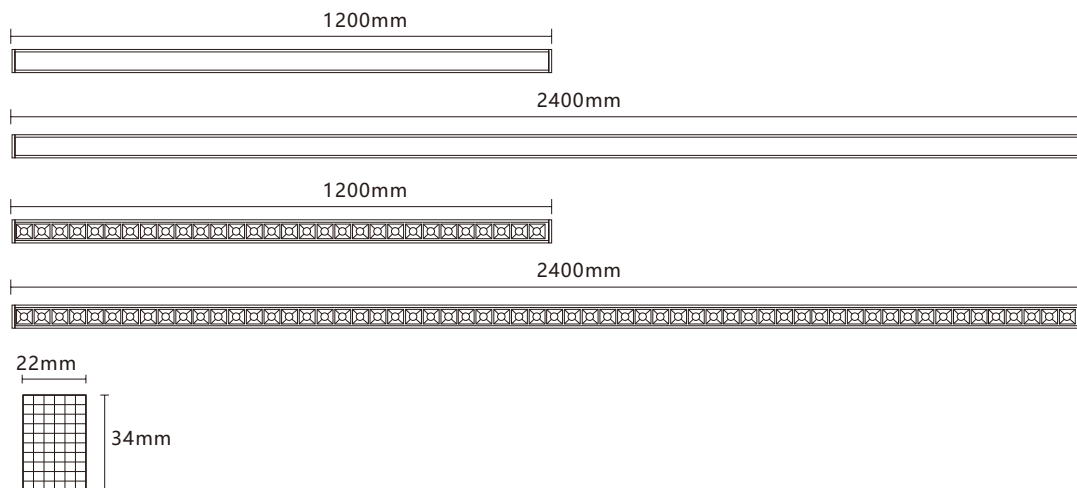

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-FG2234-1.2M	30W	2250LM	1200*22*34	10PCS/	128.5*22*47CM
KNS-DD-FG2234-2.4M	60W	5100LM	2400*22*34	10PCS/	248.5*22*47CM
KNS-DD-GS2234-1.2M	30W	2700LM	1200*22*34	10PCS/	128.5*22*47CM
KNS-DD-GS2234-2.4M	60W	5400LM	2400*22*34	10PCS/	248.5*22*47CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle



24°

120°

Color



Black



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI




XIAODU



0-10V




2.4G SMART

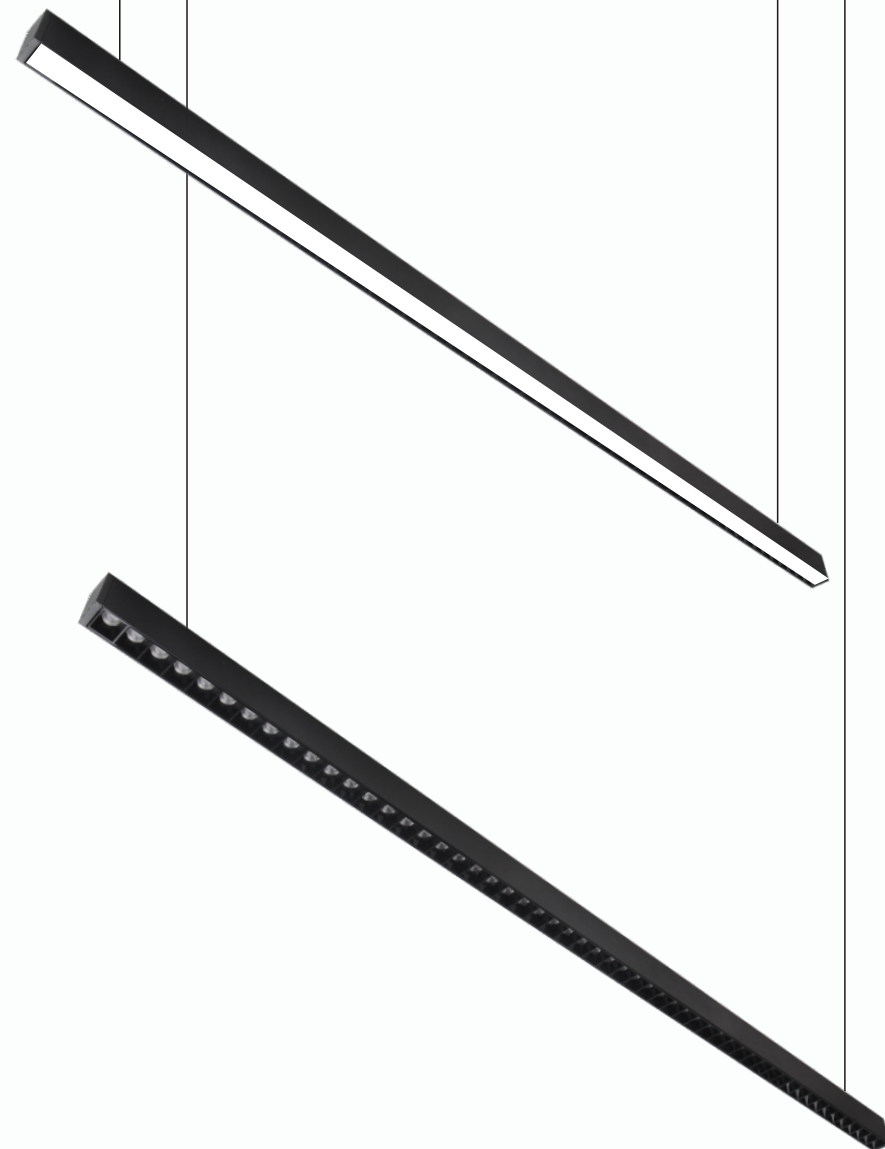



Surface mounted & pendant lamp

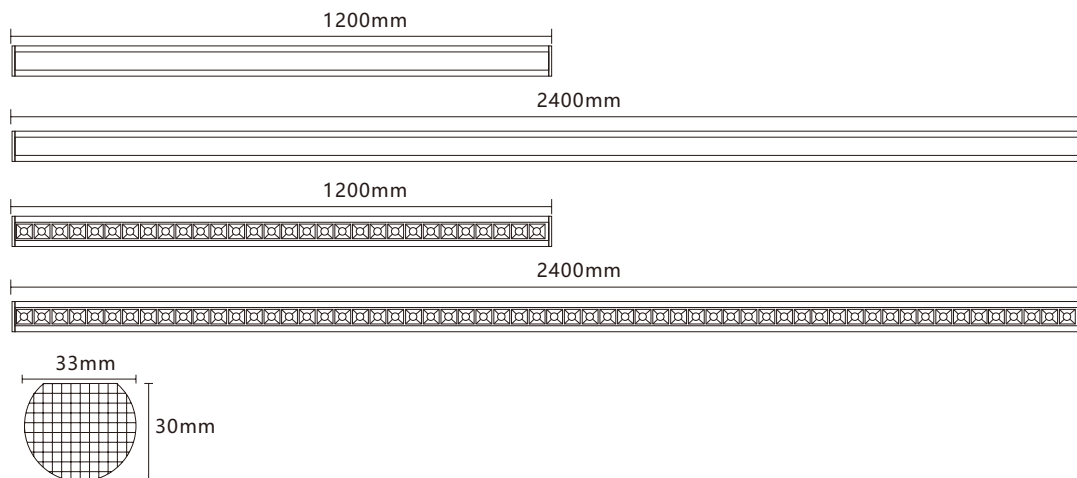

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-DD-FG3352-1.2M	30W	2250LM	1200*33*30	10PCS/	150*22*47CM
KNS-DD-FG3352-2.4M	60W	5100LM	2400*33*30	10PCS/	280*22*47CM
KNS-DD-GS3352-1.2M	30W	2700LM	1200*33*30	10PCS/	150*22*47CM
KNS-DD-GS3352-2.4M	60W	5400LM	2400*33*30	10PCS/	280*22*47CM

Light source lumens (LM/W)

≥100

Voltage

AC85-260V

CRI

Ra≥92

LIFE TIME

20000h

Material

Aluminum

Color Temperature

3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTIC

OSRAM

The Beam Angle



24°



120°

Color



Black



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU




0-10V



2.4G SMART

Surface mounted office light

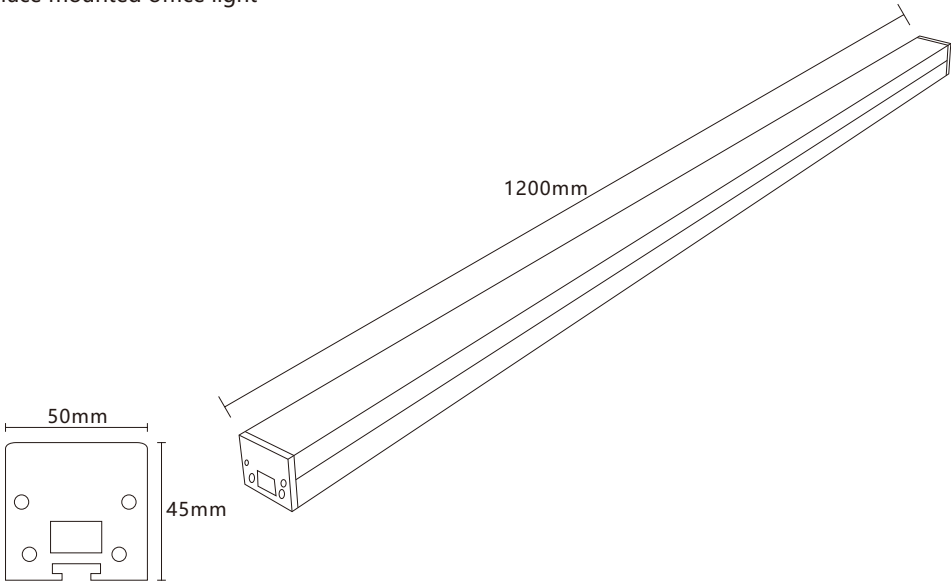

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-50	20W	1700LM	600*50*45	20PCS/	61.5*28*24CM
KNS-6524-50	40W	3400LM	1200*50*45	20PCS/	120*28*24CM
KNS-6524-50	80W	6800LM	2400*50*45	12PCS/	240*22.5*24CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL	The Beam Angle	Color
BRIDGELUX BMTC OSRAM	 120°	Black White

 NO DIM

 ZIGBEE

 TUYA INTELL NT

 MIJIA

 TMALL ELF

 XIAO AI

 DALI



 XIAODU

 0-10V

 2.4G SMART



Surface mounted office light

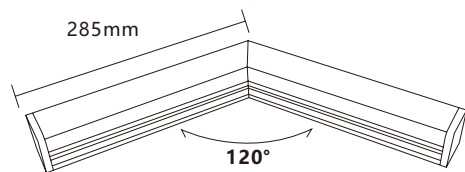

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-120°	20W	1700LM	285*285*45	10PCS/	49.5*28*27CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTc

OSRAM

The Beam Angle




120°

Color



Silvery

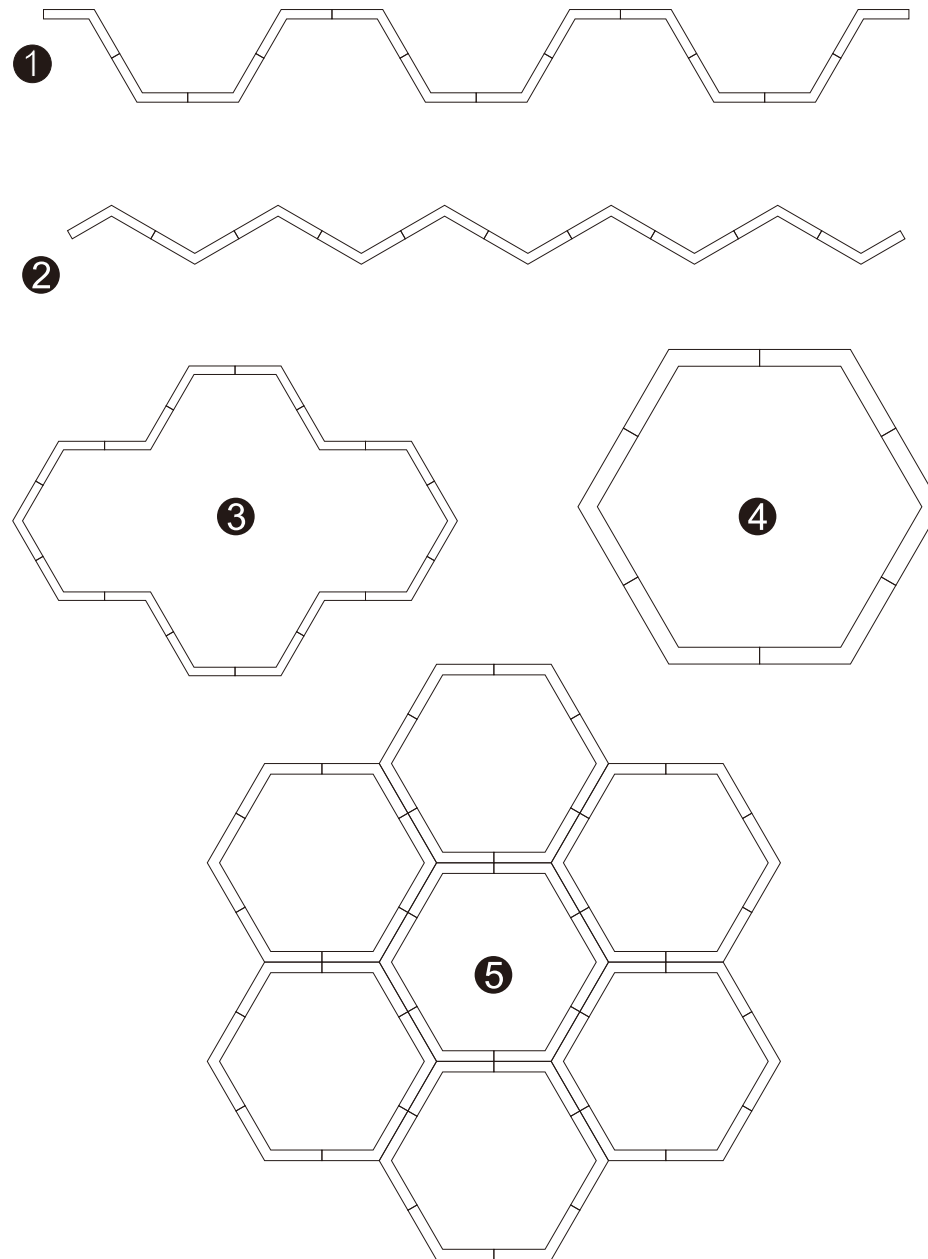

NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU



0-10V



2.4G SMART

Surface mounted office light

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-3*120°	30W	2550LM	245*245*45	10PCS/	58.5*56.5*29.5CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM



The Beam Angle

120°

Color

Silvery

Surface mounted office light

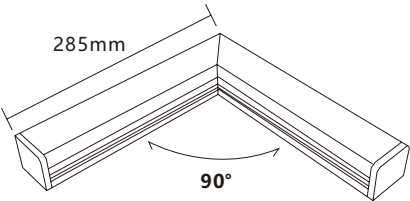

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-90°	20W	1700LM	285*285*45	10PCS/	35.5*30*29.5CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX
BMTc
OSRAM


The Beam Angle




Color




Silvery

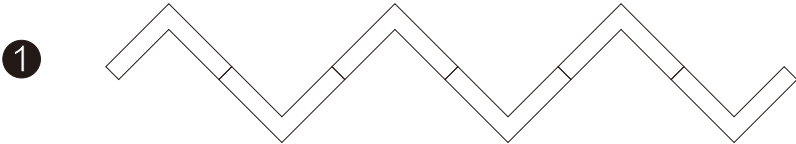

2




3

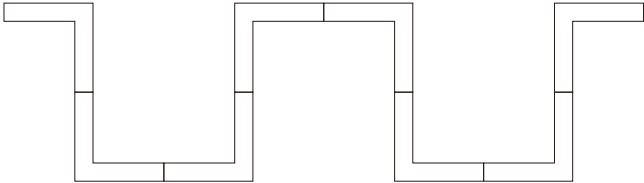

4



Surface mounted office light

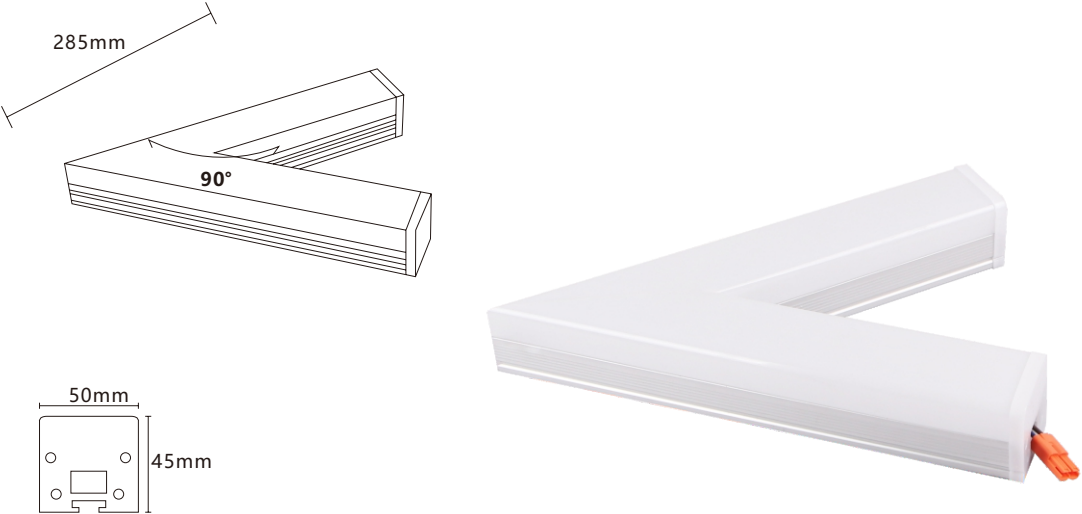

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-45°	20W	1700LM	285*285*45	10PCS/	41*23.5*27CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K


ILLUMINANT MATERIAL

BRIDGELUX
BMTc
OSRAM

The Beam Angle




Color

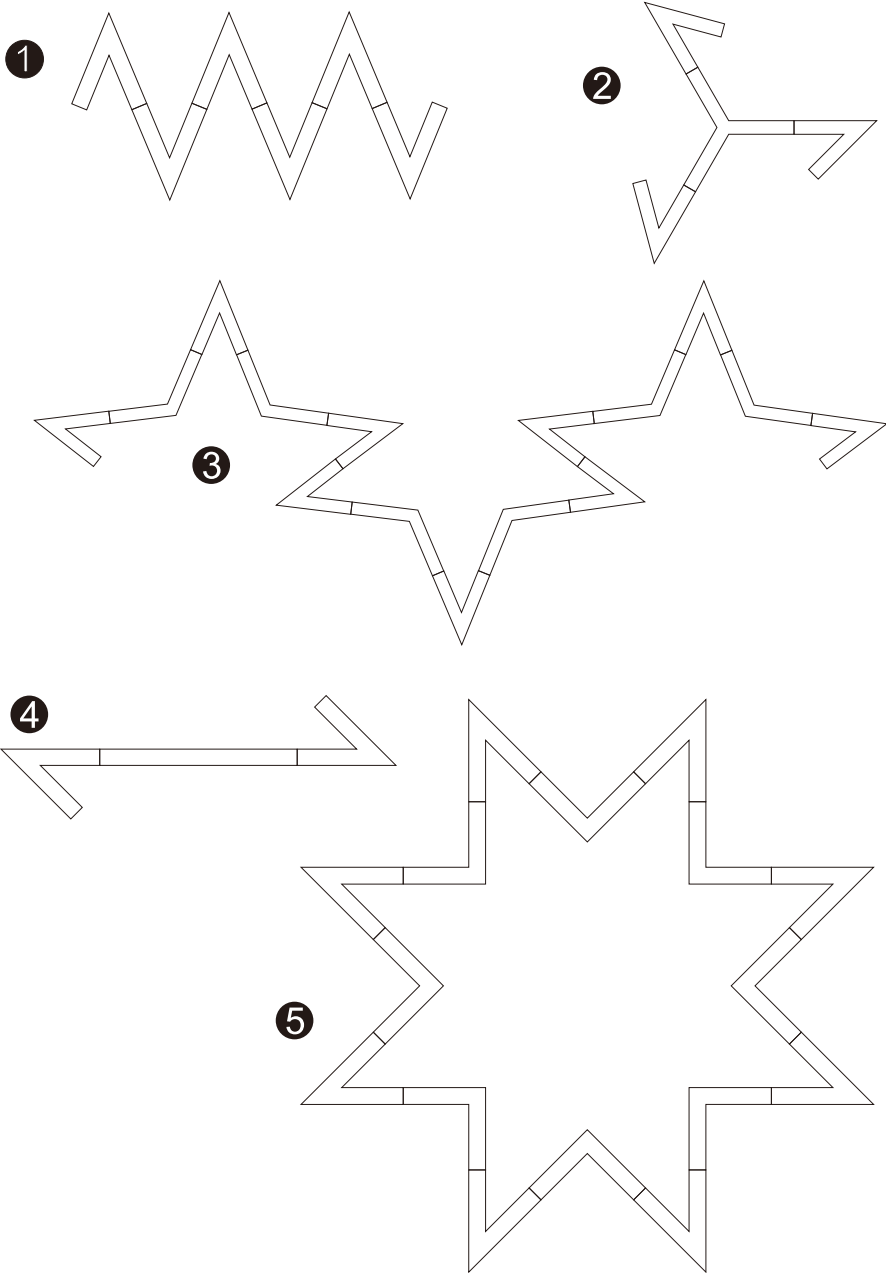

Borderless line light



novalux
DESIGN

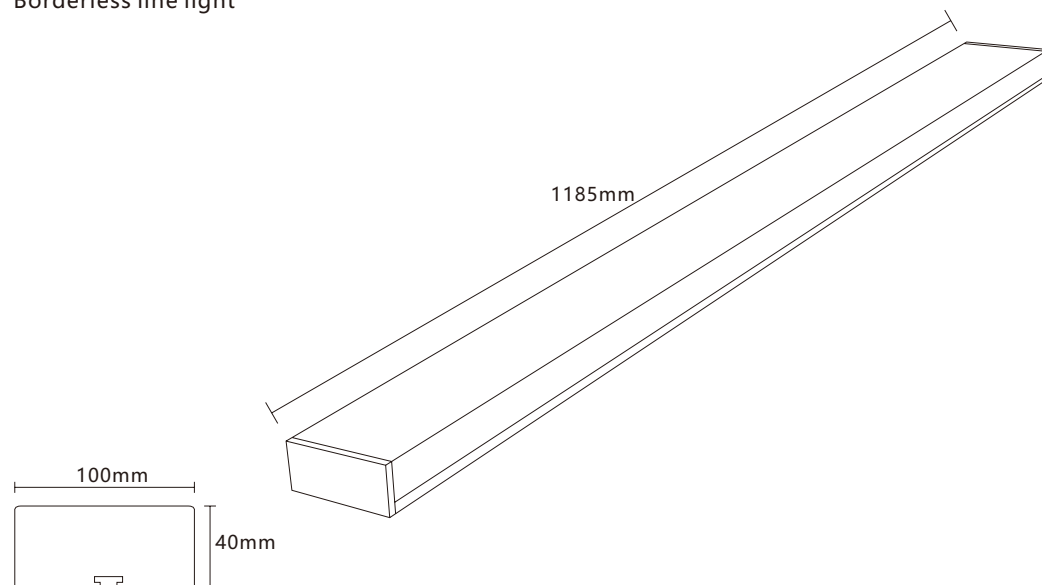

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-6524-70	40W	1700LM	1185*70*40	20PCS/	122*28*24CM
KNS-6524-100	3*20W	3*1700LM	1185*100*40	10PCS/	122*24.5*22.5CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle



120°


Color



Silvery



Surface mounted office light

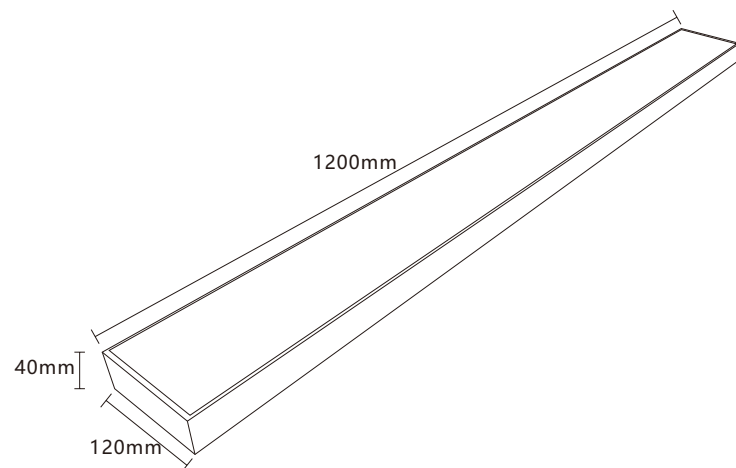

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-058	40W	3400LM	1200*120*40	10PCS/	122*24.5*27CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle



120°

Color




Black



White



Surface mounted office light

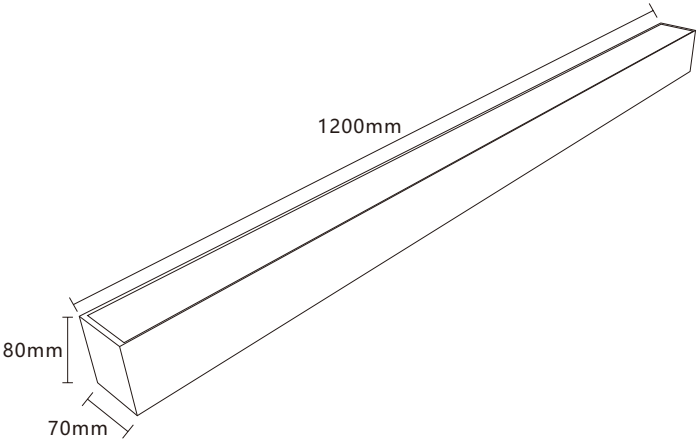

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-7080-1.2M	40W	3400LM	1200*70*80	10PCS/	122*39.5*19CM
KNS-7080-2.4M	80W	6800LM	2400*70*80	10PCS/	240*39.5*19CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL




The Beam Angle



Color



Surface mounted office light

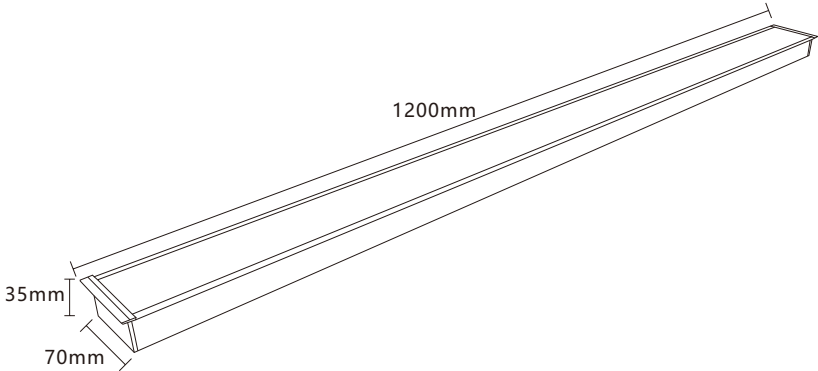

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-7035	40W	3400LM	1200*70*35	10PCS/	122.5*22*17CM

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL




The Beam Angle



Color



Surface mounted office light

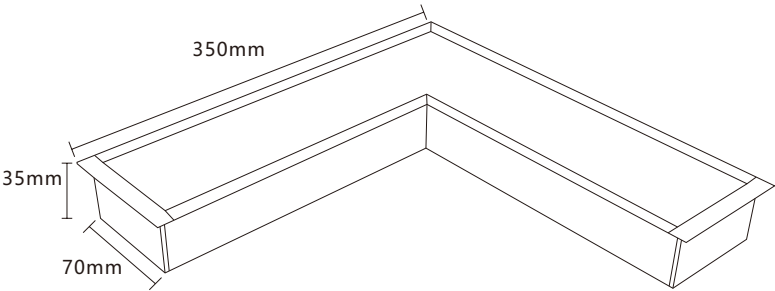

Product Code	Power	LUMEN	Size	PCS/CTNS	PACK SIZE
KNS-7035	40W	3400LM	350*70*35	20PCS/	44*39*37CM

灯珠流明 Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL



The Beam Angle




Color



Surface mounted office light



novalux
DESIGN

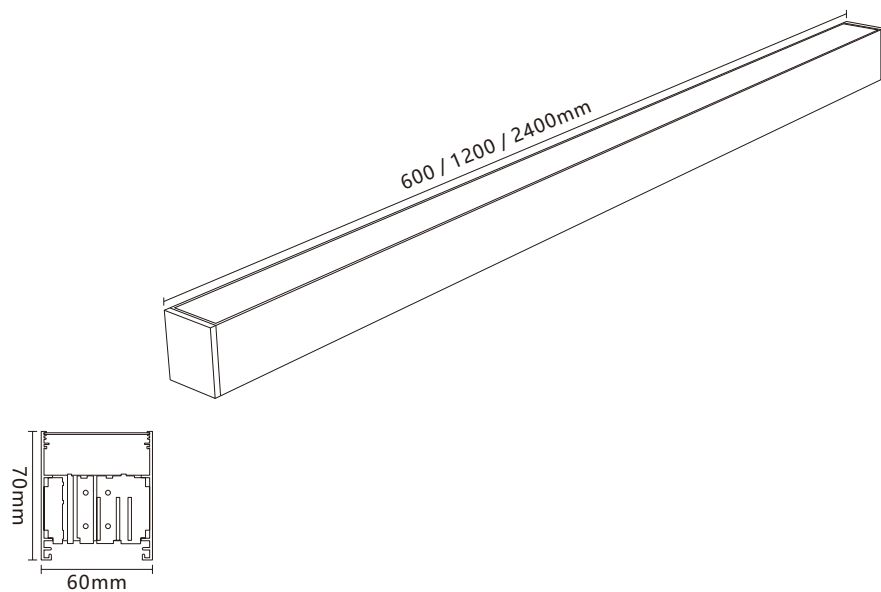

Product Code

KNS-6070-0.6M
KNS-6070-1.2M
KNS-6070-2.4M

Power

30W
60W
120W

Size

600*60*70
1200*60*70
2400*60*70

Light source lumens (LM/W)

≥100

Voltage

AC85-260V

CRI

Ra≥92

LIFE TIME

20000h

Material

Aluminum

Color Temperature

3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM


The Beam Angle



120°

Color

Black White

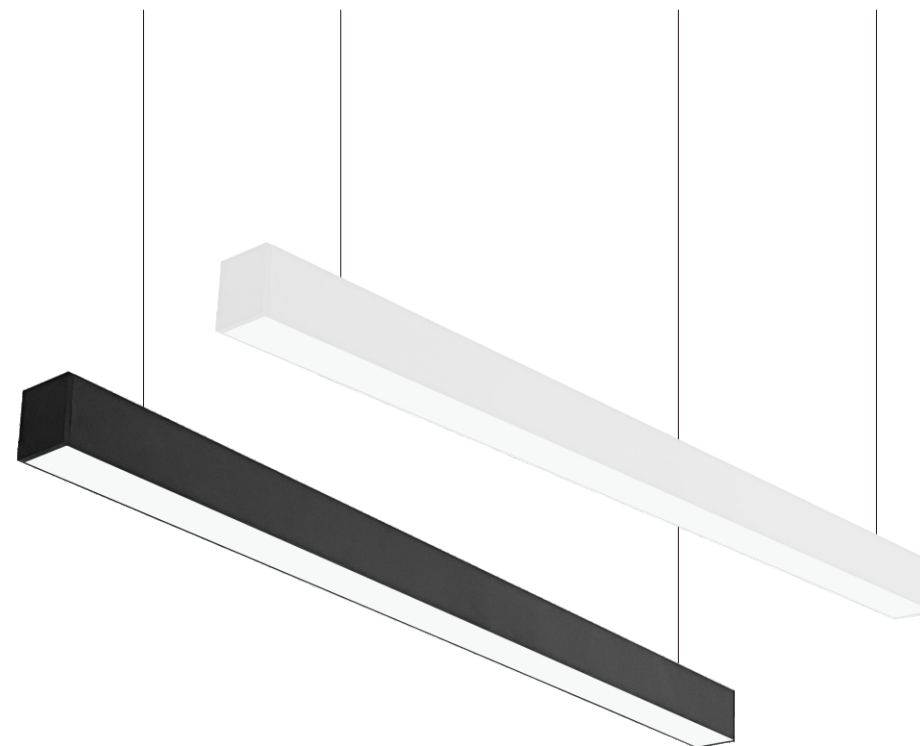

NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU




0-10V



2.4G SMART




Surface mounted office light

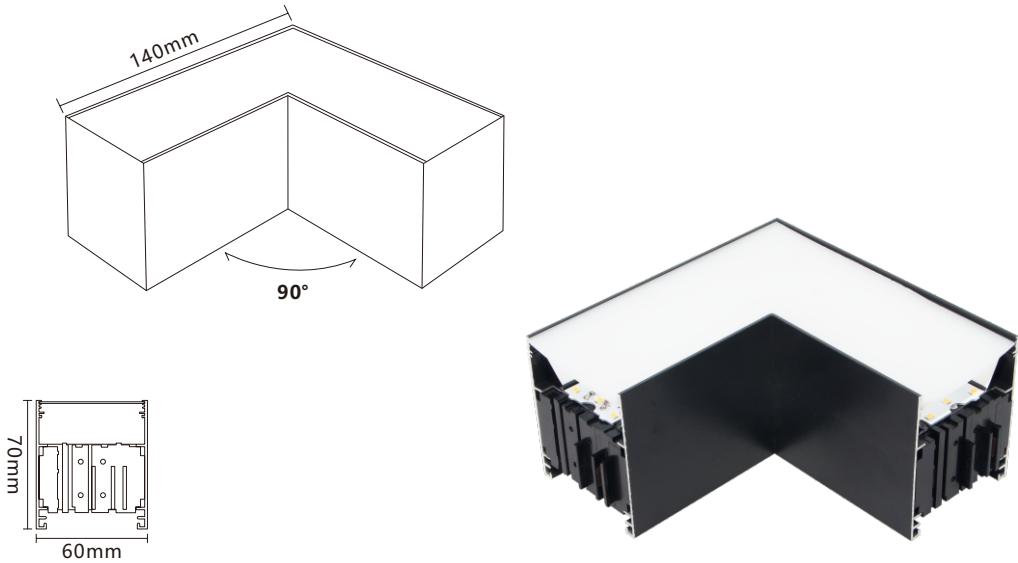


Product Code	Power	Size				
KNS-6070-SP	10W	140*60*70				
Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature	
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K	

ILLUMINANT MATERIAL	The Beam Angle	Color
BRIDGELUX BMTC OSRAM	120°	Black White

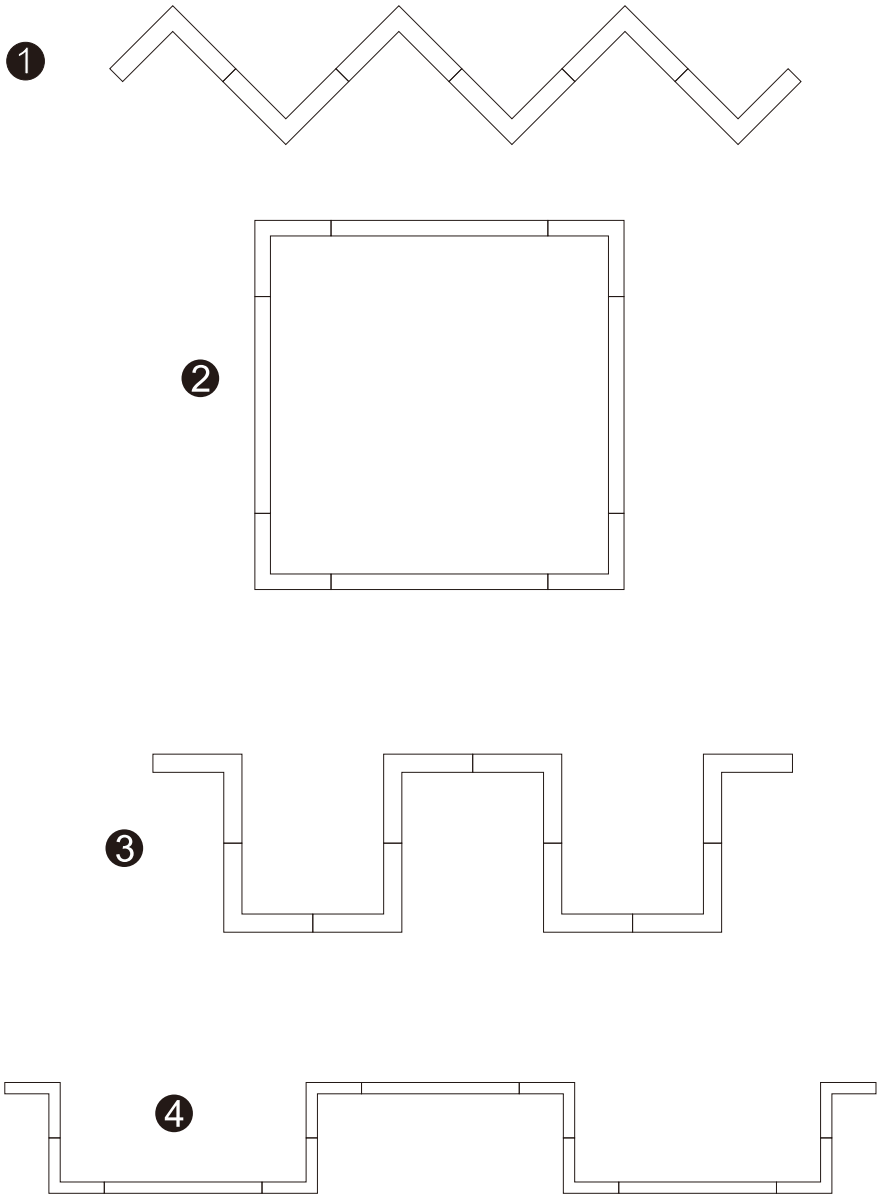


Surface mounted office light

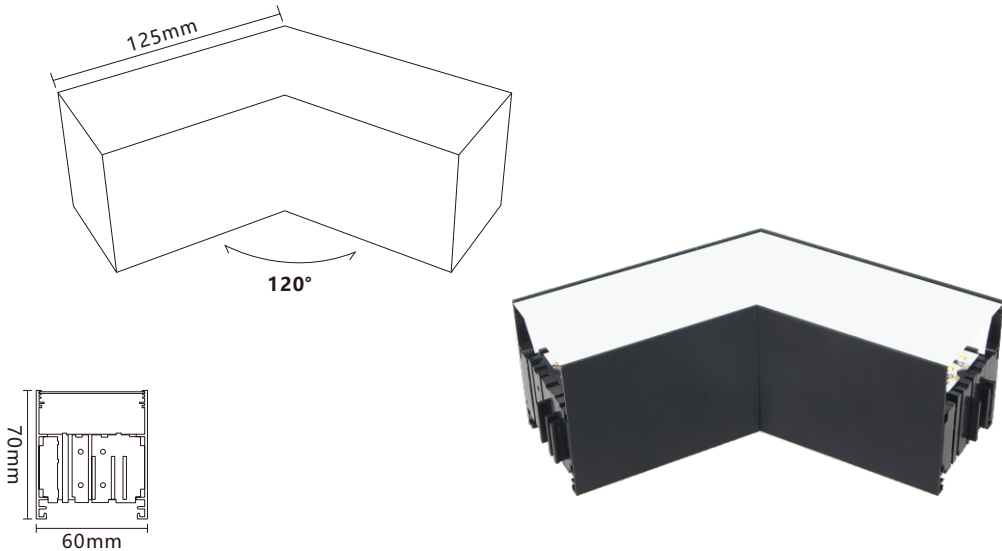


Product Code Power Size
 KNS-6070-120° 10W 125*60*70

Light source lumens (LM/W) Voltage CRI LIFE TIME Material Color Temperature
 ≥100 AC85-260V Ra≥92 20000h Aluminum 3000K/4000K/6000K

ILLUMINANT MATERIAL The Beam Angle Color
 BRIDGELUX 120° Black White
 BMTC
 OSRAM

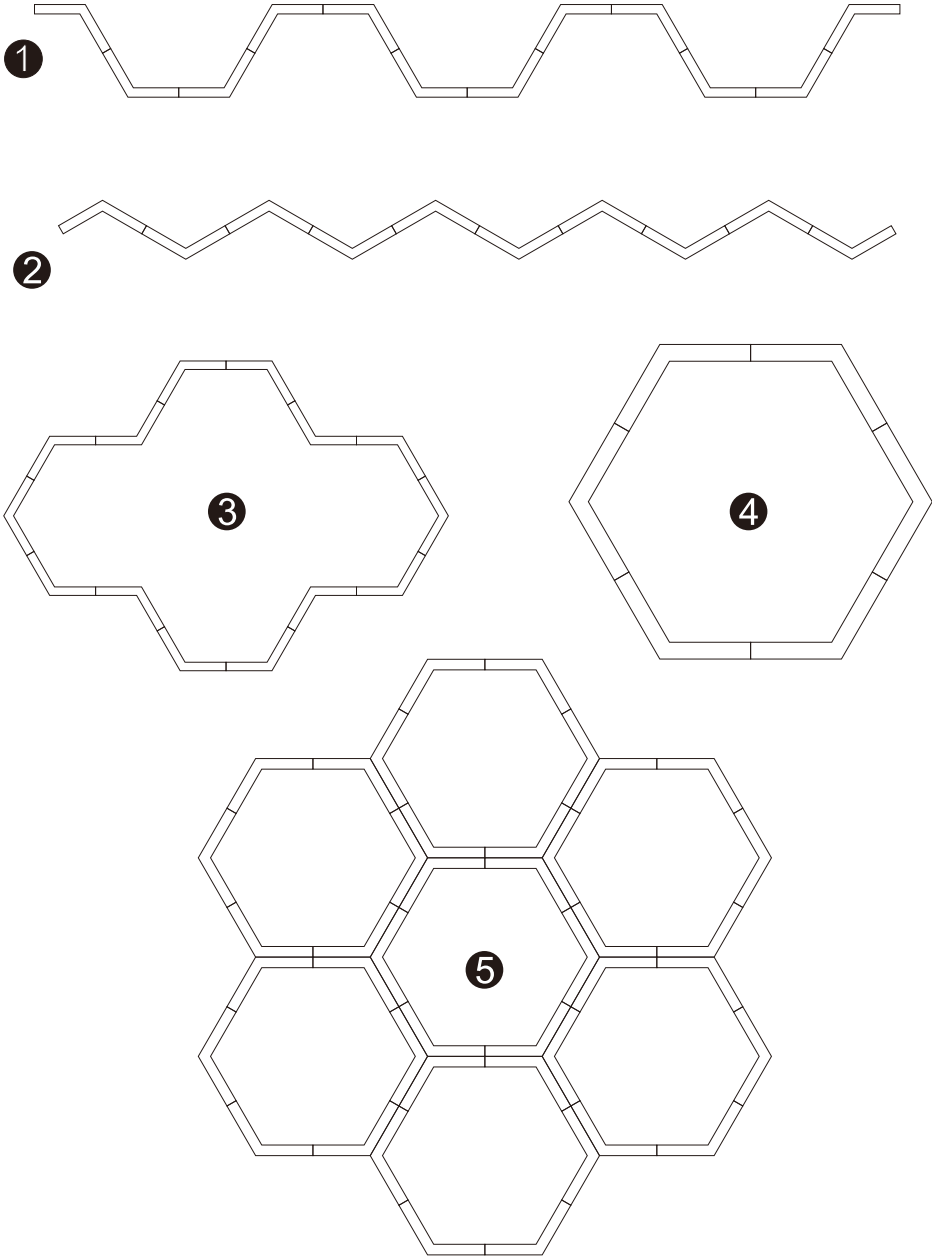

Surface mounted office light

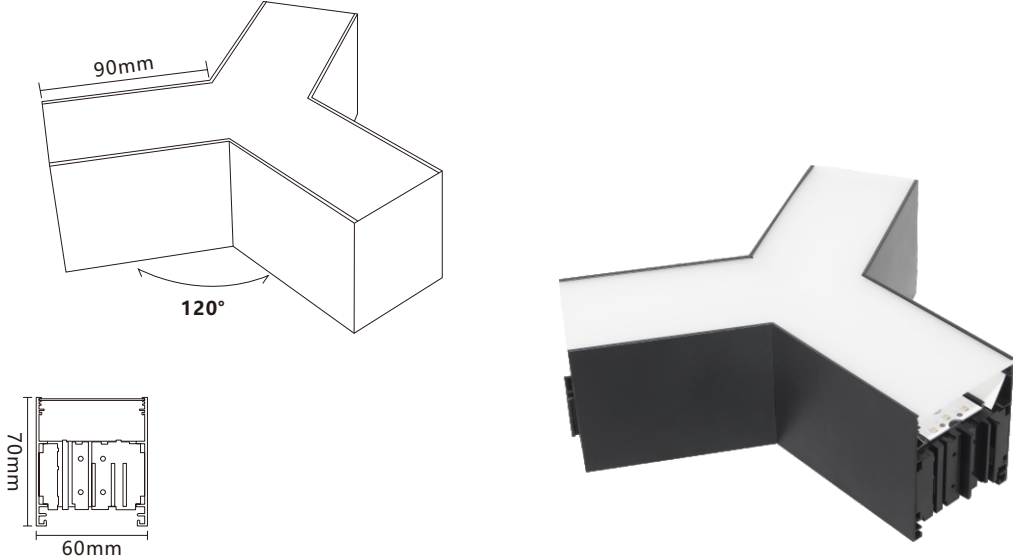

Product Code
KNS-6070-3*120°

Power
15W

Size
90*60*70

灯珠流明
Light source lumens (LM/W)
≥100

Voltage
AC85-260V

CRI
Ra≥92

LIFE TIME
20000h

Material
Aluminum

Color Temperature
3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC


OSRAM

The Beam Angle

120°



Color

Black White

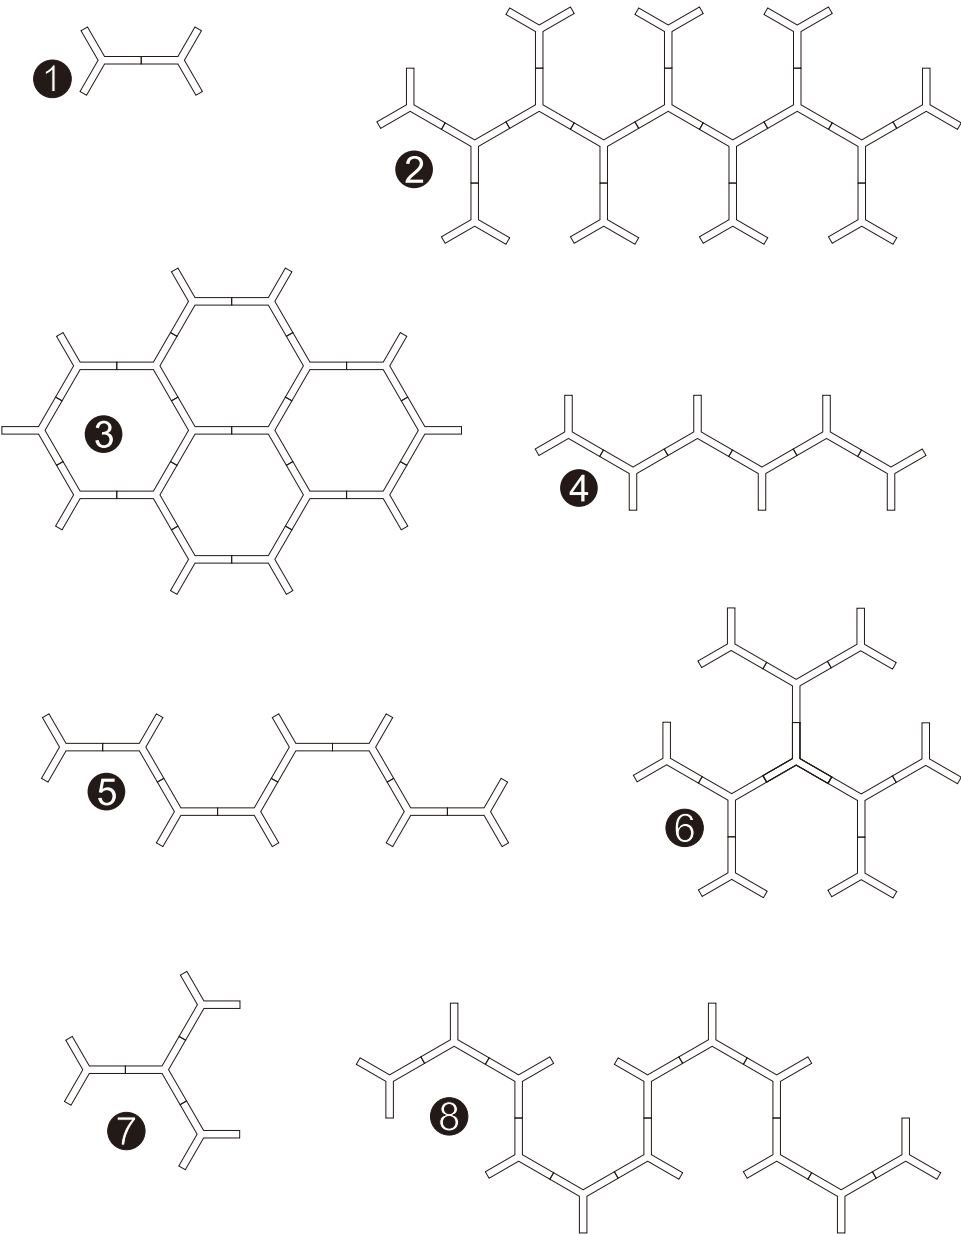





Surface mounted office light

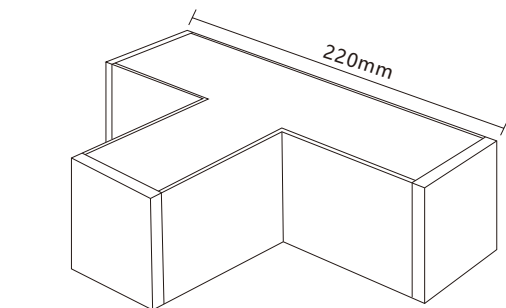


1



2

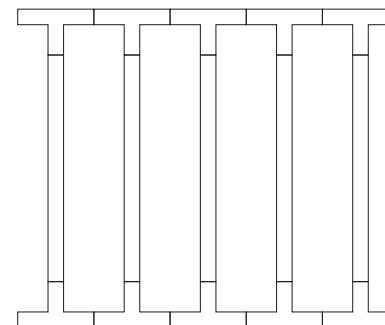

3

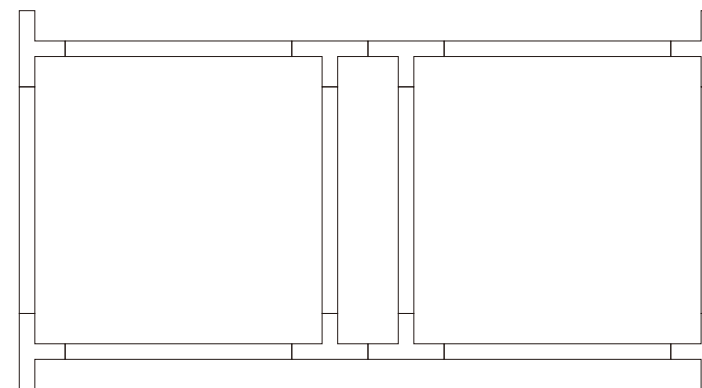

Product Code	Power	Size
KNS-6070-3T	15W	220*60*70

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle



120°

Color

Black White



NO DIM



ZIGBEE



TUYA INTELL NT



MIJIA



TMALL ELF



XIAO AI



DALI



XIAODU



0-10V






2.4G SMART






Surface mounted office light

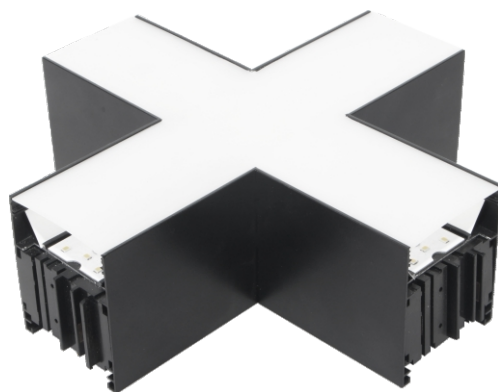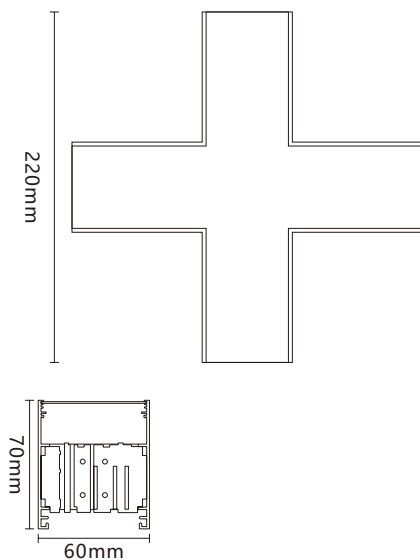

2

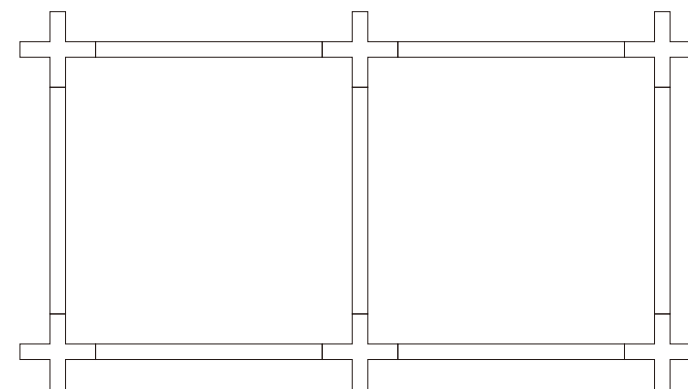

Product Code	Power	Size
KNS-6070-4T	20W	220*60*70

Light source lumens (LM/W)	Voltage	CRI	LIFE TIME	Material	Color Temperature
≥100	AC85-260V	Ra≥92	20000h	Aluminum	3000K/4000K/6000K

ILLUMINANT MATERIAL

BRIDGELUX

BMTC

OSRAM

The Beam Angle




120°

Color

Black White

3

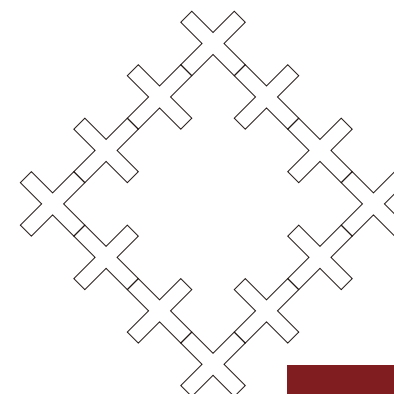

novalux
DESIGN